
Process Industry Thermocouples

Mineral Insulated Thermocouple With Plastic Handle

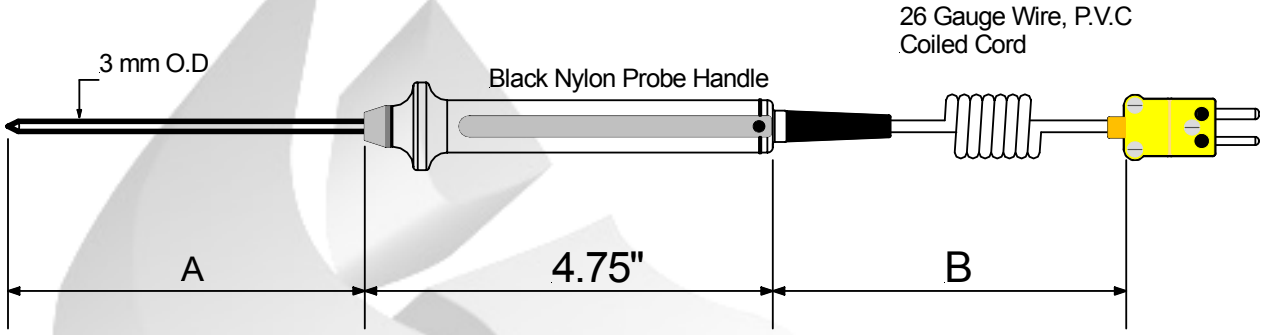

Maximum operating temperature 900 F or 500 C.

Steps To Follow: (1.) (2.) (3.) (4.) (5.) (6.)

Model: **L1** [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

1. Probe Tip Option

R	Radius Tip Style
D	Drill Tip Style

2. Termination Type

1	3" Split Leads & 1/2" Bare Ends.
2	Mini Male Plug

3. "A" Dimension

"A"= 0 4 "

Length In Inches

4. Coiled Cord "B" Dimension

	Retracted Length	Extended Length
A	12"	48" to 60"
B	24"	120"
C	32"	180"
D	60"	30 ft
E	96"	45 ft

5. Calibration

1	J	(+) Iron Vs. (-) Constantan
2	K	(+) Ni.-Chromium Vs. (-) Ni.-Aluminum
3	T	(+) CU. Copper Vs. (-) Cu.-Ni. Nickel

For all other calibrations contact factory for availability.

6. Junction

G	Grounded
U	Ungrounded

Nordic Sensors Ind. Inc. Tel: 1-888-667-3421 & Fax: 1-888-867-9986.